TOYOTA

Your fashion factory

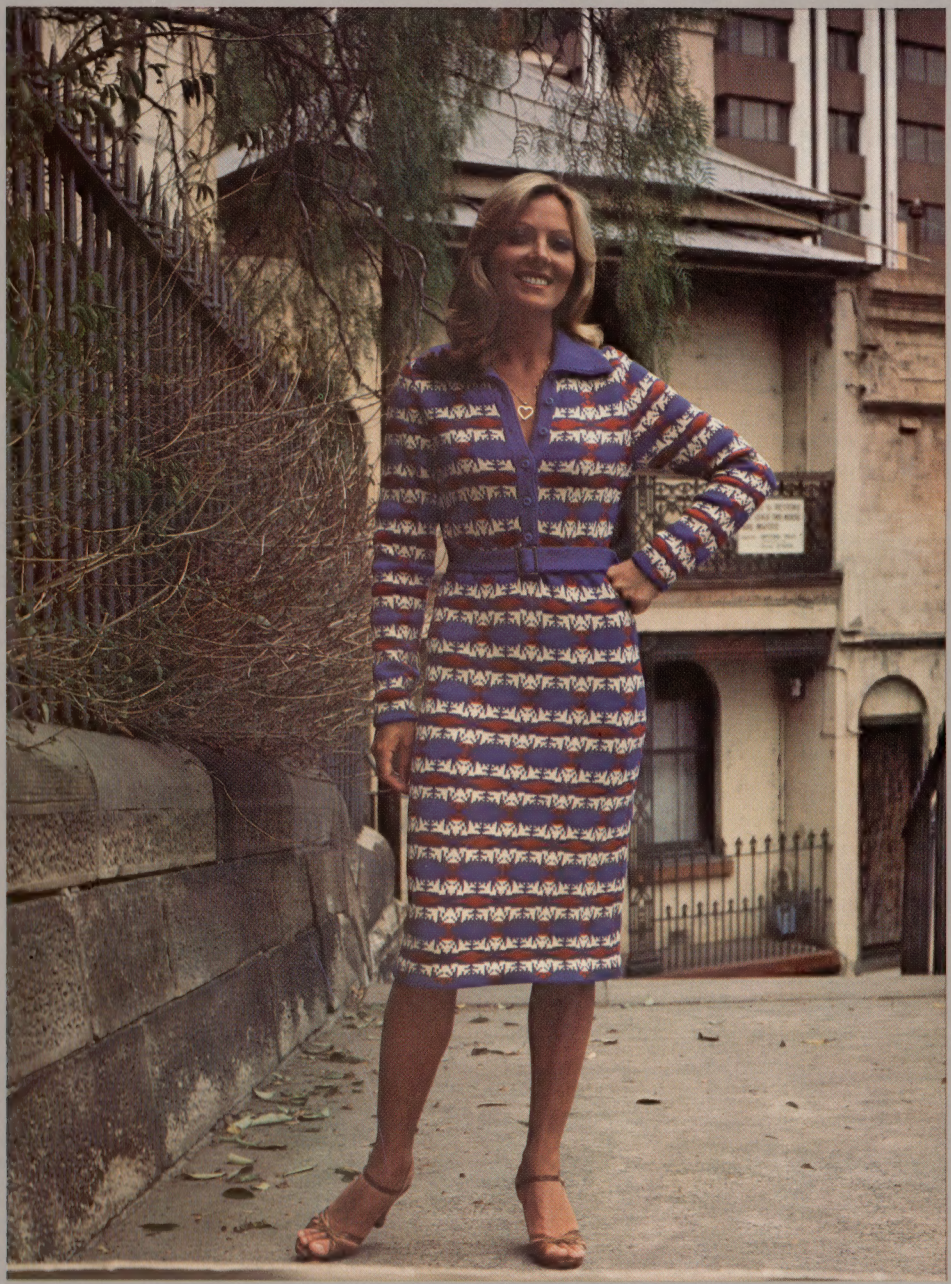

BOOK No. 201 LADIES KNIT FASHION

TOYOTA Knitting Machine

How to use THIS
tension sample GAUGE

With your main yarn and in the pattern required, knit sample using the tension recommended for your machine and for the thickness of the wool being used.

Holding GAUGING SQUARE on to knitted sample, count the number of stitches and rows within the 5 cm square cutout.

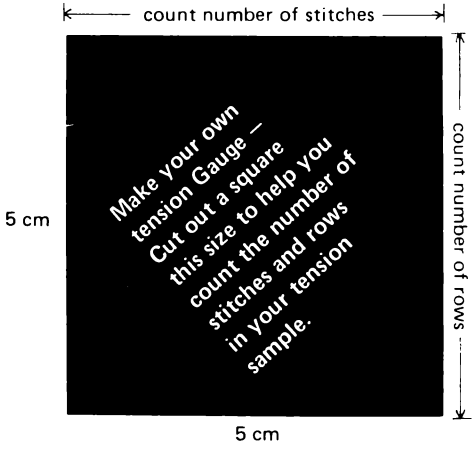
count number of stitches
5 cm
Make your own tension Gauge — Cut out a square this size to help you count the number of stitches and rows in your tension sample.
count number of rows
5 cm

To INCREASE the number of stitches and rows, use a TIGHTER TENSION.

To DECREASE the number of stitches and rows, use a LOOSER TENSION.

DO NOT FORGET!

Give knitted sample time to pull back into shape before counting stitches and rows.

A special message from Helga Guyot, Toyota's own Fashion Consultant:–

The tension mentioned in each pattern is to be used as a guide only and may have to be varied from one machine to another and definitely if other types of wool are to be used.

The tension you set actually changes the size of the garment. That is why I suggest that you always knit at least one tension sample. The method of doing this is as follows: Use the wool that you have selected and the tension that I have recommended for that particular pattern, knit 40 stitches and 40 rows, remove the sample from the machine and allow it to settle for a few hours so that the wool resumes its original shape. The next step is to measure the number of stitches and rows in a 5 cm square. Providing you have the same number of stitches and rows as I have listed in my pattern, then your garment will finish up the correct size. On the other hand, if you have more stitches and more rows than I have indicated, then the tension should be loosened, otherwise your garment will be too small. If you have too few stitches and rows within the square, your tension should be tightened, otherwise your garment will finish up too large. In both these cases, I would suggest that you alter the tension accordingly and knit a further sample. As soon as your sample ends up with the same number of stitches and rows as I have indicated in my pattern, then you know that the tension you have used for that sample should be the tension you use for the body of the garment. For rib bands, use tensions as set out in the pattern.

I suggest that you make the tension sampling easy for yourself by copying the gauge illustrated on this page.

ABBREVIATIONS:

Alt.	=	Alternate	MSB	=	Needle Selector Button
Approx.	=	Approximately	Opp.	=	Opposite
Beg.	=	Beginning	Pos.	=	Position
cm	=	Centimetre	Rem.	=	Remaining
Cont.	=	Continue	Rep.	=	Repeat
C.C.	=	Contrast	Req.	=	Required
Dec.	=	Decrease	R/C	=	Row counter
1 C.C.	=	First contrast	2 C.C.	=	Second Contrast
Foll.	=	Following	Sts.	=	Stitches
g.	=	Grams	Tens.	=	Tension
Inc.	=	Increase	3 C.C.	=	Third contrast
M.C.	=	Main colour	Trans.	=	Transfer
Knit	=	Move carriage across bed			

Front Cover
See Pattern on Page 3

Pattern No. 1
LADIES SHIRT MAKER DRESS
(Illus. Front Cover)

MEASUREMENTS:

To fit 85 (90, 95, 100) cm bust
Length centre back: 112 cm or as for length required.
Length of sleeve seams: 46 cm or as for length required.

MATERIALS: PATONS Bluebell 5-ply crepe
23 (25, 27, 29) 25 g balls main colour (main C)
9 (10, 11, 12) 25 g balls light contrast colour (1st C)
7 (8, 9, 10) 25 g balls dark contrast colour (2nd C)
Buttons for front, Buckle.

PATTERN:

FAIR ISLE PATTERN 24 sts and 33 rows with Punch Card No. 5. Colour sequence: Starting with 1st row of punch card * M in PLAIN YARN FEEDER 2nd C in COLOUR YARNFEEDER k 5 rows.
Main C in PLAIN YF
1st C in COLOUR YF, k 8 rows.
2nd C in PLAIN YF
Main C in COLOUR YF, k 7 rows.
Main C in PLAIN YF
1st C in COLOUR YF, k 8 rows
Main C in PLAIN YF
1st C in COLOUR YF, k 4 rows, reset Punch card to 1 hole before row 1 of Punch card and k 1 row.*
Repeat from * to *.

TENSION:

7.2 = 13½ sts and 17 rows to 5 cm over Fair Isle Pattern.

BACK:

With waste yarn cast on 141 (149, 155, 163) sts, k some rows with waste yarn, ending on right. With main C, tens 6.1 k 14 rows, tens 10.0 k 1 row ending on left. Insert Punch Card No. 5, set machine for Punch Card knitting. (See page 16 of Manual). Tens 7.2 k 1 row ending on right. Set machine for Fair Isle knitting.
R/c on 0, work Pattern, repeating from * to * to row 160 on r/c.
Dec 1 st at each end next and every foll 5th row 10 times altogether to 121 (129, 135, 143) sts. ** K to row 290 on r/c.

Shape armholes: R/c on 0, cast off 6 (7, 7, 8) sts at the beg of the foll 2 rows, then dec 1 st at each end next and every foll alt row 6 (7, 8, 9) times. K in right pattern continuity to row 76 (80, 84, 88) on r/c.

Shape shoulders: Cast off 8 sts at the beg of the foll 6 rows, then cast off 6 (8, 10, 12) sts at the beg of the foll 2 rows. Cast off rem sts.

FRONT:

Cast on sts and work as back to **.
K to row 225 on r/c, note following number on Punch card and k to right.

Divide for front: Using thread of main C cast off the 7 centre sts. Bring all needles on opp side of carriage to E pos. Set both Partial Knitting Levers to I and work on right side of front only.
*** R/c on 226, cont in right pattern continuity to row 290 on r/c.

Shape armhole: Cast off 6 (7, 7, 8) sts at armhole edge (right) k 2 rows, dec 1 st at armhole edge next and every foll alt row 6 (7, 8, 9) times. K to row 58 (62, 66, 70).

Shape neck: Cast off 6 sts at neck edge, k 2 rows. Dec 1 st at neck edge next and every foll alt row until 30 (32, 34, 36) sts rem. K 2 rows after last dec.

Shape shoulder: Cast off 8 (8, 8, 9) sts at shoulder edge (right) next and every foll alt row 3 times. K 2 rows after third cast off, then cast off rem sts. Set Partial Knitting Levers to 0.

Second side of front: Bring needles for second side of front down to B-pos, using tool. Press both EMPTY buttons and move carriage to left. Turn Punch Card back to noted number and set machine for Punch Card knitting. With both empty buttons pressed, move carriage to right, selecting needles for pattern. Release Empty buttons. Set machine for Fair Isle knitting, and work as for first side from *** reversing all shapings.

SLEEVES:

With waste yarn cast on 59 (63, 67, 71) sts, k some rows with waste yarn, ending on right. With main C, tens 6.1 k 14 rows. Tens 10.0 k 1 row ending on left. Insert Punch Card and set machine for Punch Card knitting. Tens 7.2 k 1 row. Set machine for Fair Isle knitting, r/c on 0, work in Pattern to row 8. Inc. 1 st at each end next and every foll 8th row to 127 (131, 135, 139) sts. K to row 160 or as for length req.

Shape top: R/c on 0, cast off 5 sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row to row 10 on r/c. Dec 1 st at each end next and every foll 4th row to row 18 on r/c. Dec 1 st at each end next and every foll alt row again to row 48 (52, 56, 60) on r/c. Dec 1 st at each end next and each foll row to row 58 (62, 66, 70) on r/c. Cast off rem sts.

COLLAR:

Front bands & facings: With wind on method cast on 17 sts in centre of machine. Tens 8.0 k 2 rows carefully. R/c on 0, k 20 rows. Work 2 Buttonholes on 4th and 5th needle from each end next and each foll 20th row 6 times altogether. K to row 126 (130, 134, 138). Take sts off with waste knitting. Work second band, omitting buttonholes.
Bring 126 (128, 130, 132) needles to B pos. Place sts from waste of Buttonhole band onto the 17 first needles on right side and second band onto the first 17 needles on left side. Transfer 17th st from each end onto 16th needle. With wind-on method cast-on on all needles between bands. Bring all needles to E

pos before next 2 rows. Tens 8.0, r/c on 0, k to row 48. Cast off 16 sts at the beg of the next 2 rows. Tens 10.0 k 1 row. Tens 7.2 k 48 rows and cast off.

BELT:

With wind-on method cast on 30 sts. Tens 6.0 k belt for req length and cast off.

FOR MACHINES WITH RIBBER ATTACHMENT: Using both needle beds, cast on 29 sts main and ribber bed combined in close rib. Tens 6.0 on both carriages k belt for req length. Dec 1 st on main bed and 1 st on ribber bed on each end next and every foll alt circular row until 5 sts rem. Transfer to main bed and cast off.

TO MAKE UP:

Join both shoulders. Set top of sleeves into armholes, then sew up side and sleeve seams. Turn hems on dress and sleeves up on turning row and fasten. Sew cast-on edge of collar to neck edge and set in front facing, overlapping at waist. Turn collar on turning row and fasten under collar over neck seam. Turn front facing to inside and fasten over seam to start of neck, then to under collar. Crochet 1 row of d.c. along front edge of Facings and Collar. Press lightly, then sew on buttons. Finish Belt and press.

Pattern No. 2

MOTIF DRESS WITH JACKET

(Illus. P. 4)

MEASUREMENTS:

To fit 80 (85, 90, 95) cm bust

LENGTH: Dress centre back to waist:
45 (46, 47, 48) cm
Skirt from waist:
80 cm all sizes or as required.
Jacket centre back:
58 (59, 60, 61) cm or as required.
Under arm sleeve seam:
43 cm all sizes or as required.

MATERIALS: PATONS Patonyle 4-ply

DRESS: 23 (25, 27, 29) 25 gram balls main colour (M)
3 (3, 3, 3) 25 gram balls for rose (1C)
3 (3, 3, 3) 25 gram balls for stripes and leaves (2C)

JACKET: 15 (16, 18, 19) 25 gram balls main colour (M)
1 ball each size for rose (1C)
2 balls each size for stripes & leaves (2C)

TENSION:

5.2 = 15 sts and 20 rows to 5 cm over st st.

PATTERN:

FAIR ISLE MOTIF over 24 sts and 50 rows. Punch Card No. 617, (additional Punch Card set). Work first 8 rows with 2C in "Colour yarn feeder". Rows 9 to 40 with 1C in "Colour yarn feeder". Rows 41 to 50 with 2C in "Colour yarn feeder".

Model 747: Work Pattern manually from graph. Set machine for Fair Isle and bring needles for Contrast up to D pos before each row. Pattern is in centre of work in each skirt panel and on left side of centre in top.

DRESS

LEFT SKIRT PANEL FOR BACK AND FRONT:

With waste yarn cast on 116 (120, 124, 128) sts, k some rows with waste yarn, then change to M.

HEM:

Tens 4.0 k 18 rows, tens 8.0 k 1 row (turning row), tens 4.0 k 18 rows and close hem.

R/c on 0, tens 5.2 k 10 rows. Dec 1 st at each end next and every foll 10th row. AT SAME TIME work Pattern as follows: 2 rows with 2C, *28 rows with M, 2 rows with 2C*. Repeat from * to * twice more, then **work 11 rows with M, ending on left. Set machine for Pattern knitting, Auto Motif dial to 3, k to right selecting needles for Motif. Work Fair Isle Motif for next 50 rows, then work with M only for next 8 rows. With 2C k 2 rows.** Cont with M only to row 320 on r/c or as for length req. Take sts off with waste knitting.

RIGHT FRONT PANEL:

With waste yarn cast on as for left panel and work hem. R/c on 0, tens 5.2 k 10 rows. Dec 1 st at each end next and every foll 10th row. AT SAME TIME work Pattern as follows: 2 rows with 2C, 28 rows with M, 2 rows with 2C. Cont as in left panel from ** to **, then work 28 rows with M, 2 rows with 2C, 28 rows with M, 2 rows with 2C. Repeat from ** to ** once more, then work with M only to row 320 on r/c or altered length. Take sts off with waste knitting.

RIGHT BACK PANEL:

With waste yarn cast on as for left panel and work hem. R/c on 0, tens 5.2 k 10 rows. Dec 1 st at each end next and every foll 10th row. AT SAME TIME work Pattern as follows: 2 rows with 2C, 28 rows with M, 2 rows with 2C. Cont as in left panel from ** to **, then work with M only to row 320 on r/c or altered length. Take sts off with waste knitting.

TOP OF DRESS:

BACK:

Bring sts from LEFT and RIGHT back panel onto needles, reducing the amount of sts to 56 (60, 64, 68) sts in each panel to make 112 (120, 128, 136) sts. Tens 5.2 k 2 rows. Arrange sts for 2 x 2 rib, set machine for double bed knitting. Tens 2.0 k 50 rows in 2 x 2 rib. Transfer sts to main bed and cont in st st. Tens 5.2, r/c on 0, k 10 rows. Inc 1 st at each end next and every foll 10th row 4 times altogether, to 120 (128, 136, 144) sts. K to row 70 on r/c.

Shape armholes: R/c on 0, cast off 5 sts at the beg of the next 2 rows, then dec 2 sts at each end next and every foll alt row twice. K 2 rows after second dec, then dec 1 st at each end next and every foll alt row 5 times. K 2 rows after last dec. Dec 1 st at each end next and every foll 8th row to row 76 (80,

84, 88) on r/c.

Shape shoulders: Cast off 6 sts at the beg of the next 6 rows, then cast off 2 (3, 4, 5) sts at the beg of the foll 2 rows. Cast off rem sts.

FRONT:

Bring sts of LEFT and RIGHT front panel back onto needles, reducing the number of sts as for back. Work rib band as on back. Transfer sts to main bed and cont in st st. Tens 5.2, r/c on 0, k 10 rows. Inc 1 st at each end next and every foll 10th row 4 times to 120 (128, 136, 144) sts. AT SAME TIME work Pattern as follows: 2 rows with 2C, then repeat from ** to ** as in skirt panel with AUTO MOTIF dial on 2. Work to row 70 on r/c.

Shape armholes: R/c on 0, cont with Pattern until complete. AT SAME TIME cast off 9 (10, 11, 12) sts at the beg of the next 2 rows, then dec 2 sts at each end next and the foll alt row. K 2 rows after second dec. Dec 1 st at each end next and every foll alt row 6 times. K to row 16 on r/c.

Shape V-neck: Transfer centre st to left adjacent needle, bring all needles on opp side of carriage to E pos, set machine for partial knitting and work on side closest to carriage only. Cont with Pattern until complete.

*Dec 1 st at neck edge next and every foll 4th row and 1 st at armhole edge next and every foll 8th row until 20 (21, 22, 23) sts rem. K to row 76 (80, 84, 88) on r/c.

Shape shoulder: Cast off 6 sts at shoulder edge next and every foll alt row 3 times, then cast off rem sts.

Second side of front: Release partial knitting levers, set r/c to 16, then work second side of front to correspond as from * to shoulder cast off.

ARMHOLE EDGING:

First join both shoulders. With wrong side facing, make sts along armhole (3 sts in every 4 rows knitted.) Tens 4.0 k 6 rows. Tens 8.0 k 1 row (turning row), tens 4.0 k 6 rows and cast off.

COLLAR:

Set machine for double bed knitting. Cast on 161 sts in 2 x 2 rib. Tens 3.0 k 40 rows in rib. Using wind-on method cast on 2 sts at the beg of the next 12 rows. K 2 rows after last cast on, then cast off all sts loosely.

TO MAKE UP:

Sew cast-off edge of collar to neck edge. Join centre front seam to start of straight edge, then turn collar to outside. Sew up skirt panels, then sew up side seams. Turn armhole bands to inside and fasten. Press only lightly if necessary.

JACKET

BACK:

With waste yarn cast on 133 (141, 149, 157) sts, k some rows with waste yarn, then change to main yarn. Tens 4.0 k 10 rows. Tens 8.0 k 1 row (turning row). Tens 4.0 k 10 rows and close hem. Tens 5.2, r/c on 0, with M only k to row 40. Dec 1 st at each end next and every foll 8th row 4 times to 125 (133, 141, 149) sts. K without shaping to row 140 on r/c or as for length required.

Shape armholes: R/c on 0, cast off 8 sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row 7 (8, 9, 10) times. K to row 76 (80, 84, 88) on r/c.

Shape shoulders: Cast off 8 sts at the beg of the next 6 rows, then cast off 6 (8, 10, 12) sts at the beg of the foll 2 rows. Cast off rem sts.

FRONTS:

With waste yarn cast on 67 (71, 75, 79) sts, k some rows with waste yarn, then work hem as on back. Close hem.

Tens 5.2, r/c on 0, with M k to row 40. Dec 1 st at side edge next and every foll 8th row 4 times to 63 (67, 71, 75) sts. K to row 140 on r/c or altered length as back.

Shape neck and armhole: R/c on 0, dec 1 st at neck edge next and every foll 4th row, AT SAME TIME cast off 8 sts at armhole edge, k 2 rows. Dec 1 st at armhole edge next and every foll alt row 7 (8, 9, 10) times. Cont with shaping on neck edge only until 30 (32, 34, 36) sts rem. K to row 76 (80, 84, 88) on r/c.

Shape shoulder: Cast off 8 sts at shoulder edge next and every foll alt row 3 times, then cast off rem sts.

Work second front to correspond, reversing all shapings.

SLEEVES:

With waste yarn cast on 61 (65, 69, 73) sts, k some rows with waste yarn, then change to M. Tens 4.0 k 10 rows, ten 8.0 k 1 row (turning row), tens 4.0 k 10 rows and close hem. Tens 5.2, r/c on 0, k 4 rows. With 2C k 2 rows. Inc 1 st at each end next and every foll 8th row AT SAME TIME k 14 rows with M, 2 rows with 2C. Cont with M only and shaping at each end until there are 95 (99, 103, 107) sts. K to row 160 on r/c or as for length req.

Shape top: R/c on 0, cast off 6 sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row to row 10 on r/c. Dec 1 st at each end next and every foll 4th row to row 18 on r/c. Dec 1 st at each end next and every foll alt row again to row 46 (50, 54, 58) on r/c. Dec 1 st at each end next and each foll row to row 56 (60, 64, 68) on r/c and cast off.

FRONT BAND:

First join both shoulders. With wrong side facing, make sts along front edge of cardigan from hem to centre of back. (2 sts in every 3 rows knitted). R/c on 0, with 2C, tens 5.2 k 1 row. Tens 4.1 k 1 row. With M k 12 rows, with 2C k 2 rows. With M k 4 rows. Tens 8.0 k 1 row (turning row). Tens 4.1 k 20 rows to row 41 on r/c and cast off loosely.

NOTE: Work buttonholes into right front band at row 8 and row 25 of band if required.

POCKETS:

K twice. With waste yarn cast on 44 sts in centre of

machine. K some rows with waste yarn, then change to M. Tens 4.0 k 10 rows, tens 8.0 k 1 row, tens 4.0 k 10 rows and close hem. Tens 5.2 k 3 rows ending on left. Set machine for Pattern knitting, AUTO MOTIF dial to 3, k to right, selecting needles for Pattern. Work in Fair Isle Motif for 50 rows. Cont with M only for 4 more rows, then cast off.

TO MAKE UP:

Set top of sleeves into armholes, then sew up side and sleeve seams. Sew up centre seam of neck band, turn neck band to inside and fasten. Match buttonholes if any. Sew pockets into place. Press only lightly if necessary.

FAIR ISLE MOTIF

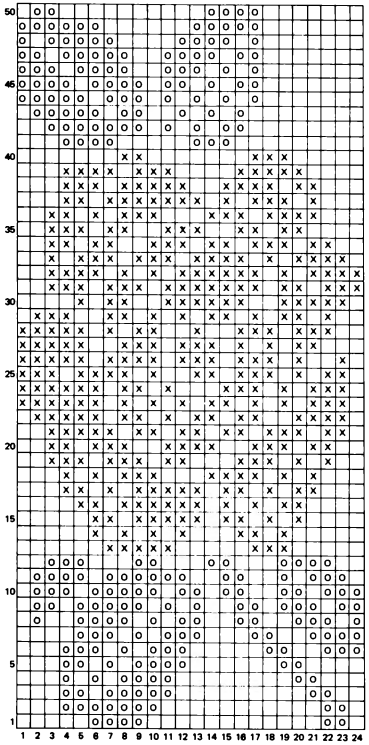

Black O= leaves
Red X= rose

Pattern No. 3

COWL NECK JUMPER

(Illus. P. 9)

MEASUREMENTS:

To fit 80 (85, 90, 95, 100) cm bust

Length: Centre back: 55 (56, 58, 59, 60) cm or as required.

Sleeve seam: 46 cm (all sizes) or as required.

MATERIALS: PATONS Bluebell 5-ply
21 (22, 24, 25, 26) 25 g balls

TENSION:

7.1 = 14 sts and 20 rows to 5 cm over st st.

BACK:

Cast on 113 (121, 127, 135, 141) sts in 1 x 1 rib, complete cast-on, then set machine for Single Fishermans rib. Tens 4.0 on main and 3.0 on ribber carriage, r/c on 0, rib to row 80 on r/c.

Transfer sts to main bed and cont in st st. Tens 7.1, r/c on 0, k 10 rows. Inc 1 st at each end next and every foll 20th row 4 times to 121 (129, 135, 143, 149) sts. K to row 90 (90, 94, 94, 94) on r/c.

Shape armhole: R/c on 0, cast off 6 (7, 7, 8, 9) sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row 6 (7, 8, 9, 10) times. **K to row 72 (76, 80, 84, 86).

Shape shoulders: Cast off 7 (7, 7, 8, 8) sts at the beg of the next 6 rows, then cast off 7 (9, 10, 9, 9) sts at the beg of the foll 2 rows. Cast off rem sts.

FRONT:

Cast on sts and work as back to **.
K to row 50 (52, 56, 58, 58) on r/c.

Shape neck: Using extra thread of main yarn, cast off the 21 centre sts. Bring all needles on opp side of carriage to E pos, set Partial knitting levers to 1 and work on side closest to carriage only. *Dec 1 st at neck edge next and each foll row 4 times, k 1 row after last dec. Then dec 1 st at neck edge next and every foll alt row until 28 (30, 31, 33, 33) sts rem. K to row 72 (76, 80, 84, 86) on r/c.

Shape shoulders: Cast off 7 (7, 7, 8, 8) sts at shoulder edge next and every foll alt row 3 times, then cast off rem sts.

Second side of neck: Set r/c to 50 (52, 56, 58, 58), release Partial knitting lever and work second side of neck to correspond first from*.

SLEEVES:

Cast on 59 (61, 63, 65, 67) sts in 1 x 1 rib, complete cast-on, then set machine for Single Fishermans rib. Tens 4.0 on main and 3.0 on ribber carriage r/c on 0, rib to row 40 on r/c.

Transfer sts to main bed and cont in st st. Tens 7.1, r/c on 0, k 8 rows. Inc 1 st at each end next and every foll 8th row to 89 (93, 97, 103, 109) sts, K without shaping to row 160.

Shape top: R/c on 0, cast off 5 sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row to row 10 on r/c. Dec 1 st at each end next and every foll 4th row to row 18 on r/c. Dec 1 st at each end next and every foll alt row to row 44 (48, 50, 54, 56) on r/c. Dec 1 st at each end next and each foll row 10 more times to row 54 (58, 60, 64, 66) on r/c and cast off.

COLLAR:

Cast on 161 sts (all sizes) in 1 x 1 rib. Complete cast-on, then set machine for Single Fishermans rib. Tens 4.0 on main and 3.0 on ribber carriage. R/C on 0, rib to row 160 and cast off very loosely.

TO MAKE UP:

Join both shoulders. Set in top of sleeves, then join side and sleeve seams. Sew up collar seam, then sew cast off edge of collar evenly to neck edge, keeping seam very loose. Fold collar to outside. Press only lightly.

Pattern No. 4

CHANEL SUIT

(Illus. P. 9)

MEASUREMENTS:

To fit 85 (90, 95, 100, 105) cm bust
92 (97, 102, 107, 112) cm hip

Length of Skirt: 64 cm all sizes or as required.

Length of Jacket, centre back: 67 (68, 69, 70, 71) cm or as required.

Length of sleeve seams: 41 cm all sizes, or as for length required.

MATERIALS:

PATONS Columbine, 7-ply, as main yarn.
PATONS Bluebell, 5-ply, as contrast yarn.
COLUMBINE: 16 (17, 19, 21, 23) 50 gram balls (M)
BLUEBELL: 2 (2, 3, 3, 4) 25 gram balls (C)
Elastic for skirt.

TENSION:

8.0 = 13½ sts and 17 rows to 5 cm over st st.

SKIRT

BACK AND FRONT:

Using M cast on 125 (131, 139, 145, 153) sts in 1 x 1 rib, odd needle on right end. Tens 1.0 work circular cast on, ending on left.

PATTERN BORDER:

**Set MS Button 1, 5 and 9, *Zig Zag dial on 1, Left Pattern Knit lever to 'PATTERN', k 1 row (selecting needles).

(747: pull lever now.) Change to C, set machine for TUCK STITCH knitting, tens 5.0 on both carriages, TUCK selected needles over 4 rows, change to M, set machine for plain knitting and k 1 row.*

Zig Zag dial to 3, k to right (selecting needles). (747: pull lever now).

Change to C, set machine for TUCK STITCH knitting and TUCK selected needles over 4 rows. Change to M, set machine for plain knitting and k 1 row. Repeat from * to *. **

K 1 row.

Transfer all sts to main bed and cont in st st. R/c on 0, tens 8.0 k to row 150 on r/c, alter length here.

Shape hip: Dec 1 st at each end next and every foll 6th row 9 times. (Row 204 on r/c.)

Waist band: Tens 5.0 k 10 rows, tens 10.0 k 1 row (turning row), tens 5.0 k 10 rows and cast off.

TO MAKE UP:

Sew up side seams. Join elastic to fit waist, then turn waistband down from turning row and slipstitch over elastic. Press only lightly.

JACKET

BACK:

With main yarn, cast on 123 (131, 137, 145, 151) sts in 1 x 1 rib. Work Pattern Border as on skirt from ** to **.

K 1 row.

Transfer all sts to main bed and cont in st st. Tens 8.0 r/c on 0, k to row 30 on r/c. Dec 1 st at each end next and every foll 6th row 6 times. K 10 rows after 6th dec, then inc 1 st at each end next and every foll 10th row 3 times, ending with 117 (125, 131, 139, 145) sts. K without shaping to row 140 on r/c.

Shape armholes: R/c on 0, cast off 5 (6, 6, 7, 8) sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row 4 (5, 6, 7, 8) times. K to row 66 (70, 72, 76, 78) on r/c.

Shape shoulders: Cast off 8 sts at the beg of the next 6 rows, then cast off 7 (8, 9, 10, 11) sts at the beg of the foll 2 rows. Cast off rem sts.

RIGHT FRONT:

Using waste yarn, cast on 50 (53, 57, 60, 64) sts, k some rows with waste yarn, then change to main yarn. K 2 rows. R/c on 0, with wind-on method cast on 2 sts at front edge (right) next and every foll alt row 6 times, ending with 62 (65, 69, 72, 76) sts. K to row 30 on r/c. Dec 1 st at side edge (left) next and every foll 6th row 6 times. K 10 rows after last dec, then inc 1 st at side edge (left) next and every foll 10th row 3 times. K without shaping to row 130 (all sizes).

Shape neck: Dec 1 st at neck edge (right) next and every foll 4th row 3 (3, 4, 4, 4) times. K 4 rows after last dec.

Shape armhole: R/c on 0, cont to dec 1 st at neck edge next and every foll 4th row, AT SAME TIME cast off 5 (6, 6, 7, 8) sts at armhole edge (left), k 2 rows. Dec 1 st at armhole edge next and every foll alt row 4 (5, 6, 7, 8) times. Shape at neck edge only until 31 (32, 33, 34, 35) sts rem. K straight to row 66 (70, 72, 76, 78) on r/c.

Shape shoulder: Cast off 8 sts at shoulder edge (left) next and every foll alt row 3 times, then cast off rem sts.

LEFT FRONT:

Cast on sts and work same as for right front, reversing all shapings.

SLEEVES:

With M cast on 69 (71, 73, 75, 77) sts in 1 x 1 rib. Work Pattern Border as on skirt from ** to **. K 1 row.

Transfer all sts to main bed and cont in st st. Tens 8.0, r/c on 0, k 8 rows. Inc 1 st at each end next and every foll 8th row to 85 (87, 89, 91, 93) sts. K without shaping to row 126 on r/c or as for under arm length req.

Shape top: R/c on 0, cast off 4 sts at the beg of the next 2 rows, then dec 1 st at each end next and every foll alt row to row 10 on r/c. Dec 1 st at each end next and every foll 4th row to row 22 on r/c. Dec 1 st at each end next and every foll alt row again to row 44 (46, 48, 50, 52). Dec 1 st at each end next and each foll row to row 54 (56, 58, 60, 62) on r/c and cast off.

TRIMMINGS FOR:

Jacket front: K twice. With M cast on 191 sts in 1 x 1 rib. Work as for Pattern Border of skirt from ** to **. K 1 row. Transfer all sts to main bed. Tens 8.0 k 1

row on main bed only and cast off.

K once. With M cast on 101 (109, 117, 125, 133) sts in 1 x 1 rib and work same as before.

Sleeves: K twice. With M cast on 45 sts and 1 x 1 rib. Work same as bands for front.

Pockets: K twice. With M cast on 37 sts in 1 x 1 rib. Work same as bands for front.

TO MAKE UP:

Join both shoulders. Set top of sleeves into armholes, then sew up sleeve seams. Sew up side seams, holding in 2 (2, 6, 6, 6) rows of front for bust. Join side edges of the Trimmings for Front then sew cast off edge neatly along cast-on edge of front, then around corner, along front and neck edges of front. Take off waste knitting.

Sew side edge of sleeve trimming onto Border of sleeves, matching pattern and in centre of back-half of sleeve. Sew cast off edge of sleeve-trimming onto sleeve, forming a corner, then in vertical line for approx 10 cm. Fasten side edge onto sleeve. Sew Mock-Pocket-Flaps into place. Press only lightly.

Pattern No. 5

SUMMER SUIT WITH SWINGING SKIRT OR HAREM PANTS

(Illus. Back Cover)

MEASUREMENTS:

To fit 75 (80, 85, 90, 95) cm bust
82 (87, 92, 97, 102) cm hip

LENGTH:

TOP:	Under arm to hem:	40 cm
	Under arm to waist:	20 cm
SKIRT:	Waist to hem:	65 cm
PANTS:	Waist to ankle:	110 cm
	Inside leg:	85 cm

Length of all garments can be altered by adding or subtracting rows at the given point in the TOP and PANTS and by adding or subtracting stitches in the SKIRT.

MATERIALS: PATONS Azalea, 3-ply

TOP:	8 (8, 9, 10, 11) 25 gram balls
SKIRT:	10 (11, 12, 13, 14) 25 gram balls
PANTS:	17 (18, 20, 21, 23) 25 gram balls

TENSION: 3.2 = 16 sts and 22½ rows to 5 cm over st st.

PATTERN:

LACE AND TUCK Pattern over 12 sts and 8 rows.

SET MS Buttons 1, 5 and 9.
Both Pattern knit levers to Pattern.
LEFT partial knitting lever to II
Zig Zag dial to 1.
Select needles with last row of st st.

*Move LC from left to right and back. RIGHT partial knitting lever to II, k 3 rows.
Move Zig Zag dial to 3, RIGHT partial knitting lever to 0, k 1 row. (Knitting all sts, selecting needles for next pattern row.)
Move LC from left to right and back. RIGHT partial knitting lever to II, k 3 rows.
Move Zig Zag dial to 1, RIGHT partial knitting lever to 0, k 1 row.*
Repeat from * to *.

747: Set MS Buttons 1, 5 and 9, **Zig Zag Dial on 1 *pull lever, move LC from right to left and back. Pull lever, press in both buttons 2, k 3 rows. Release button 2 closest to knitting, k 1 row.* Zig Zag dial to 3, Repeat from * to *. ** Then repeat from ** to **.

PANTS

BACK:

K twice, reversing shapings on second part.

With waste yarn cast on 120 (124, 128, 132, 136) sts.

Hem: K some rows with waste yarn, then use ravelling cord for 1 row, ending on right. With main yarn, tens 3.2 k 1 row. Tens 3.0 k 6 rows, ending on left. WORK PICOT EDGE: Set first and every foll alt MS button bring LEFT Pattern knit lever to Pattern k 1 row selecting needles. Move LC from left to right and back. Bring LEFT Pattern knit lever to plain. Tens 3.0 k 8 rows and close hem.

Tens 3.2 k 3 rows and pull ravelling cord. With carriage on left, bring LEFT Pattern knit lever to Pattern, k 1 row selecting needles. Move LC from left to right and back. R/c on 0, k to row 80 on r/c. Dec 1 st at right end next and every foll 10th row and dec 1 st at left end next and every foll 20th row until 91 (95, 99, 103)sts rem. K without shaping to row 380 on r/c or as for inside leg length required.**

Shape crotch: R/c on 0, cast off 8 sts at right end, k 2 rows. Dec 1 st at right end next and every foll alt row 4 times, k 2 rows after last dec. Now dec 1 st at right end next and every foll 4th row 3 times. K to row 20 on r/c. Dec 1 st at right end next and every foll 10th row 3 times, then k to 120 on r/c.

Shape extra length on back of pants: Set machine for partial knitting. Carriage on right. (K 1 row on second part, when sides of shaping are reversed.)
Bring 8 needles on left end to E pos, k 1 row, lay yarn under first inner needle in E pos, k 1 row. Repeat from * to * 4 more times. Release partial knitting levers. K 2 rows over all needles.

Waistband: Tens 2.0 k 10 rows, tens 8.0 k 1 row, tens 2.0 k 10 rows and cast off loosely.

FRONT OF PANTS:

K twice, reversing shapings on second part.
Cast on sts and work as back of pants to **.

Shape crotch: R/c on 0, cast off 8 sts at right end, k 2 rows. Dec 1 st at right end next and every foll alt row 8 times. K 2 rows after last dec. Now dec 1 st at right end next and every foll 4th row 8 times, then k to row 120 on r/c.

Waistband: Work as for back

CORDS:

K twice. With wind-on method cast on 5 sts. Press in left EMPTY button. Tens 0.0 k cord for length

required for ankle tie. Fasten off.

TO MAKE UP:

Sew up both side and inside leg seams, then join front and back seam. Join elastic to fit waist and turn waist band on turning row to inside and encasing elastic, slipstitch down. Pull cords through holes on on ankle. Press lightly.

SKIRT

With waste yarn cast on 190 sts. (Add sts to lengthen, subtract sts to shorten).*** Tens 3.2 k 10 rows, ending on left.

Set machine for partial knitting. Bring 10 needles on opposite side of carriage to E pos, k 1 row, lay yarn under first inner needle in E pos, k 1 row. Repeat from * to * 4 more times. (50 needles in E pos). **Bring 20 more sts on opposite side of carriage to E pos, k 1 row, lay yarn under first inner needle in E pos, k 1 row.** Repeat from ** to ** 5 more times, (170 needles in E pos), ending on left. Release partial knitting lever closest to knitting.***

Repeat from *** to *** 23 (25, 27, 29, 31) times. K 1 row after last repeat and take all sts off with waste knitting.

WAISTBAND:

With wrong side facing, make sts along the upper (short) side of skirt, 3 sts in every 4 rows knitted. Tens 3.0 k 8 rows, tens 8.0 k 1 row (turning row), tens 3.0 k 8 rows and cast off very loosely.

HEM:

Divide hem width into 4 sections and make sts for hem in each section separately. With wrong side facing make sts along hem edge, 2 sts in every 3 rows knitted. Work as for waist band. Cast off very loosely.

TO MAKE UP:

Graft sts from cast-off and cast-on together for centre back seam. Sew up seams of hem section, then turn hem on turning row and fasten to inside. Join elastic to fit waist, then turn waistband to inside encasing elastic and fasten. Press lightly.

TOP

FRONT:

With waste yarn cast on 132 (140, 148, 156) sts, work hem as on leg edge of pants.

R/c on 0, tens 3.2 k to row 80 on r/c. Dec 1 st at each end next and every foll 6th row 4 times. K to row 99 on r/c, ending on left. Press first and every foll MS button, set LEFT Pattern knit lever to Pattern and k to right, selecting needles. Move LC from left to right and back. Release left Pattern knit lever, k to row 190 on r/c.***

Shape neck and armhole: Divide needles in centre and bring needles on opposite side of carriage to E pos. Set machine for partial knitting and work on side closest to carriage only.

*Dec 1 st at neck edge next and every foll 4th row, AT SAME TIME cast off 10 sts at armhole edge, k 2 rows. Dec 1 st at armhole edge next and every foll alt row 9 (10, 11, 12) times. K 2 rows after last dec. Dec 1 st at neck edge next and every foll alt row and 1 st at armhole edge next and every foll 4th row until 5 sts rem.

Cord: Press in right EMPTY button, tens 0.0 k cord for 30 to 35 cm and fasten off.

Second side of neck: Release partial knitting levers and work second side of neck to correspond first side as from * to end of cord.

BACK

Cast on sts and work as front to ***. Cast off loosely.

POCKET:

With waste yarn cast on 48 sts and work hem as on leg of pants. Tens 3.2, k 3 rows and pull ravelling cord. With carriage on left, bring LEFT Pattern knit lever to Pattern, k 1 row selecting every alternate needle. Move LC from right to left and back. K 4 rows, r/c on 0.

Set machine for Pattern and work in Pattern to row 68 on r/c, repeating from * to *. Cont in Pattern, AT SAME TIME dec 2 sts at each end next and every foll 4th row 3 times. Cast off rem sts.

TRIMMINGS:

For back: With waste yarn cast on 155 (165, 175, 185) sts, k some rows with waste yarn, then work hem as on leg of pants. Tens 3.2 k 1 row ending on left. Set machine for Pattern and k to right, selecting needles. R/c on 0, work in Pattern to row 60 on r/c and cast off.

For front: K twice, reversing all shapings on second part. With waste yarn cast on 139 (145, 151, 157) sts, k some rows with waste yarn, then work hem as on leg edge of pants. Tens 3.2 k 1 row ending on left. Set machine for Pattern and k to right, selecting needles. R/c on 0, work in Pattern. AT SAME TIME dec 1 st at right edge next and every foll alt row and 1 st at left edge next and every foll 4th row to row 60 on r/c. Cast off.

CORD:

With wind-on method cast on 5 sts. Press in left EMPTY button. Tens 0.0 k cord for length required for waist string and fasten off.

Work short end of cord to pull through upper edge of pocket.

TO MAKE UP:

Sew up side seams. Sew up centre front seam (sharper dec) of trimming, then sew sides to trimming for back. Sew cast off edge of trimming to neck edge, from centre front to shoulder strap, down to side seams and along cast off on back. Crochet one row of d.c. around same edge. Measure shoulder strap for length, then sew onto upper edge of back. Pull cord through waist and upper row of holes of pocket. Press lightly.

World Copyright by Toyota Knitting Machines of Australia

Designed by Helga Guyot
Produced and Printed by Mastercraft Printing

Back Cover
See Pattern on Page 10